

# 1000 C SZ Containerised Safezone Air Compressor



## Description

The Centurion Power & Equipment 1000 cfm Safezone Air Compressors are ideal for use in safe areas. All units are containerised, resulting in easy transportation, on-site stacking and easy access for operation and servicing.

The units were uniquely designed to provide operating personnel with the ability to access and operate upper level units when stacked from within the unit through internal access hatches.


This fully internal design provides enhanced protection and safety for operating personnel whilst eliminating requirements for scaffolding which further reduces the encroachment on deck space.

## Key Features

- Heavy duty, fully bunded DNV 2.7-1 offshore container
- Designed for stacking in use – ISO Blocks for locked-on safety
- Internal personnel access way between units when stacked
- Rugged, reliable mechanical marine engine and high ambient cooler
- All-pneumatic starting and shutdown systems
- Compact footprint – transport three in a 40ft shipping container

## Options

- Remote shutdown and refuelling from deck level
- Air treatment – aftercooling, filtration and drying
- Exhaust extensions for multiple installations
- Experienced offshore service technician(s) for operational and maintenance assistance

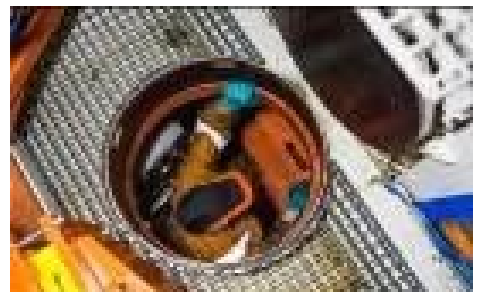

**AIR, STEAM AND POWER SOLUTIONS FOR CRITICAL INDUSTRIES.**

## Technical Specifications

Performance	
Flow	1000 cfm / 2,812 m <sup>3</sup> /min
Working Pressure	150 PSIG / 10 bar
Fuel Tank	695 litres
Fuel Consumption	65 litres/hr
Full Load Running	10 hours
Ambient Operating Temperatures	-10°C / 45°C
Noise at Full Load	111 dba
Vibration at Full Load	0.87 mm/s
Start System	Pneumatic
Safety System	Pneumatic
Engine Specification	
Engine Model	Caterpillar 3306 DITA
Power Output at Flywheel	320hp / 230Kw
Engine Idle Speed	1200 / 1500rpm
Maximum Engine Speed	2100rpm
Engine Oil Capacity	28 litres
Engine Oil Specification (Minimum)	15w40 Mineral
Engine Coolant Capacity	200 litres
Fuel Specification	Gas Oil (BS2869 Class A2&D)

**AIR, STEAM AND POWER SOLUTIONS FOR CRITICAL INDUSTRIES.**

### Lifting Specification, Weights & Dimensions

Lifting Spec	DNV 2.7-1
Length	3990 mm
Width	2250 mm
Height	2210 mm
Weight (kg dry)	8,200 kgs
Weight (kg op)	8,500 kgs
Max Gross Weight	10,000 kgs
Shipping Weight	8,500 kgs

### Compressor Performance

Model	Ingersoll Rand 226 mm
Type	Oil Flooded Screw
Output	1000 cfm
Maximum Operating Pressure	150 psi
Lubrication Oil Capacity	85 litres
Lubrication Oil Specification	HVI 46

### Operating System

Start System Air Supply	115psi – 150psi
Start Air Supply	680cfm (maximum)
Safety System Shutdowns	Pneumatic
Compressor Discharge	2 x 2" and 2 x 3/4" ball valves
Air Connection	1 x 3/4" Crowsfoot

**AIR, STEAM AND POWER SOLUTIONS FOR CRITICAL INDUSTRIES.**

### Safety Features

External Emergency Stop	2 x Push Button
Internal Emergency Stop	1 x Push Button
Internal Lighting	110 volt with emergency battery backup
Exhaust Manifold	Water Cooled
Exhaust Turbocharger	Water Cooled
ISO Interlockers	Positive Lock When Stacked
Rig ESD Connection	Electro / Pneumatic
Scramble Net	Escape System when Stacked

Note: The above referred specifications are our minimum standard and for guidance purposes only. For compressor specific information applicable to comply with region specific standards, please consult your local Centurion Power & Equipment representative.

For more information on Air Compressors, please contact your local Centurion Power & Equipment representative or email us at [CPEUK@centuriongroup.co.uk](mailto:CPEUK@centuriongroup.co.uk).



**AIR, STEAM AND POWER SOLUTIONS FOR CRITICAL INDUSTRIES.**