

10Te / 1500L Tine Hydraulic Grab



Description

The 10Te / 1500L Tine Hydraulic Grab can be used for a range of applications such as debris recovery and boulder relocation operations.

The system can be used with our AUXROV for subsea power and fine control or it can be deployed with a vessel crane and powered from the surface.

Key Features

- Heavy duty / large capacity grab
- Can be powered subsea or from the surface
- Comes with quick connects for AUXROV use.

What's Included

- Hydraulic Grab
- AUXROV Interface (if needed)
- Operational Hoses
- Operations Manual.

Options

- Surface HPU
- Downlines
- Hydraulic Hose Reel

SUBSEA SOLUTIONS THAT CHALLENGE CONVENTIONAL THINKING.

Specifications

Overall Specs


Arm Capacity 1,500 dm³

Weight 2,350 kg

Teeth No. 5

SWL 10,000 kg

Dimensions (from image right)
 A 2,840 mm
 C 2,500 mm
 E 1,870 mm

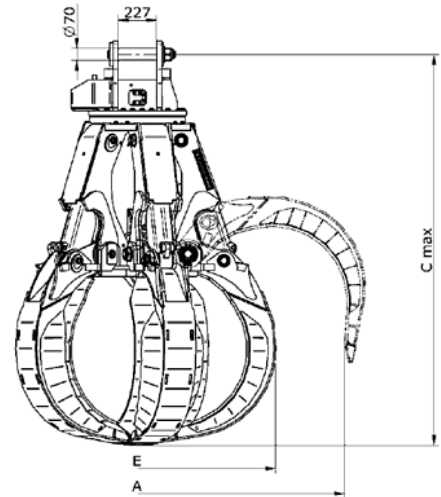

SUBSEA SOLUTIONS THAT CHALLENGE CONVENTIONAL THINKING.