


Low Pressure Handpump (Single or Double Acting)

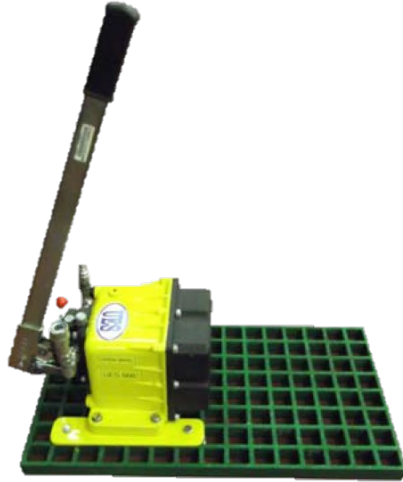

Description

The Low Pressure Handpump (Single or Double Acting) is suitable for topside operations to function hydraulic jacks and cutters.

Key features

- Max operating pressure: 300 bar

What's Included

- Operating Manual

Model

- Double Acting

SUBSEA SOLUTIONS THAT CHALLENGE CONVENTIONAL THINKING.

Specifications

Overall Specs

Max Working Pressure	300 bar
Controls	Double Acting Pressure & Vent Valve Hand Operated Piston Lever
Reservoir	3 Litre
Relief Valve	Safety Relief Valve Fitted Internally Adjustable up to 300 bar
Dimensions	235 X 240 X 180 H (No Lever)
Weight	11.2 kg w/ Grating



SUBSEA SOLUTIONS THAT CHALLENGE CONVENTIONAL THINKING.