


25Te Hydraulic Shackle

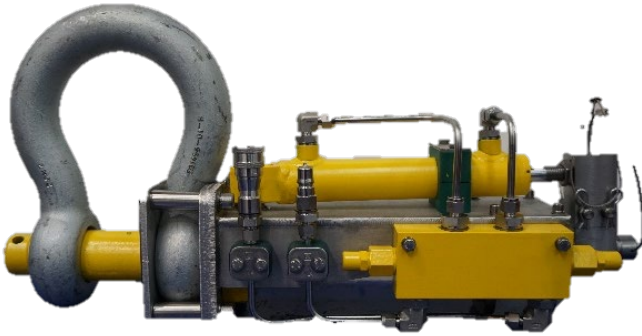

Description

The 25Te Hydraulic Shackles are designed for topside and subsea operations which allows for remote hydraulic control of the shackle pin, allowing the operator to engage and disengage remotely.

Key Features

- Designed with a three-stage mechanical disconnect, which disconnects the cylinder from the pin if the cylinder fails

What's Included

- Operating Manual
- Certification

Model

- 25Te

SUBSEA SOLUTIONS THAT CHALLENGE CONVENTIONAL THINKING.

Specifications

Overall Specs	
SWL	25 Te
Shackle Size	25 Te
Flow	0.5-10 l/min
Pressure	200 bar
Weight	26 kg
Length Open	753 mm
Length Closed	620 mm
Width	120 mm
Height	302 mm
Shackle Opening Width	64 mm
Porting	¼" ISO B Couplers



SUBSEA SOLUTIONS THAT CHALLENGE CONVENTIONAL THINKING.